

LED Exit Sign

ELECTRICAL SPECIFICATIONS:

- Dual 120/277 voltage.
- Charge rate/power “ON” LED indicator light and push to test switch for mandated code compliance testing.
- 4.8V Long-life, maintenance-free, rechargeable NiCd battery
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

LIGHTING SPECIFICATIONS:


- 2C: Dual circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- Custom: Signs available with requested ‘special’ wording.
- USA: Substantial transformation assembly in the U.S. complies with “Assembled in the USA” under the Buy American Act.

MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

HOUSING SPECIFICATIONS:

- Injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- EZ snap-out chevron directional indicators.
- Compact, low-profile design.

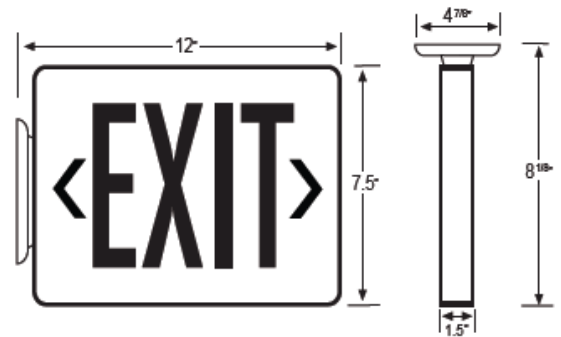

ORDERING INFORMATION

Model	No. Of Faces	Battery	Letter Color	Housing Color	Options
61001	1 Single Face 2 Single/Double Face	Blank AC Only EM Battery Backup	R Red G Green	W White B Black	SDT Self Diagnostics 2C Dual circuit operation Custom Custom wording USA Assembled in USA cUL cUL Listed