

LED Exit & Emergency Combo Sign

ELECTRICAL SPECIFICATIONS:


- Dual 120/277 voltage.
- One 1.1 watt white LED per lamp head.
- Unique bi-color LED indicator alerts occupant on battery condition (Green-normal, Red-check battery).
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 6V Long life, maintenance-free, rechargeable NiCd battery
- Internal solid-state transfer switch automatically connect the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Mounting canopy included for top or end mount.
Universal knockout pattern on back plate for wall mount.

HOUSING SPECIFICATIONS:

- Specification-grade, low profile thin plastic design
- Patented, field selectable universal single/double face configuration.
- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- EZ snap-out Chevron directional indicators
- Remote capacity option available.

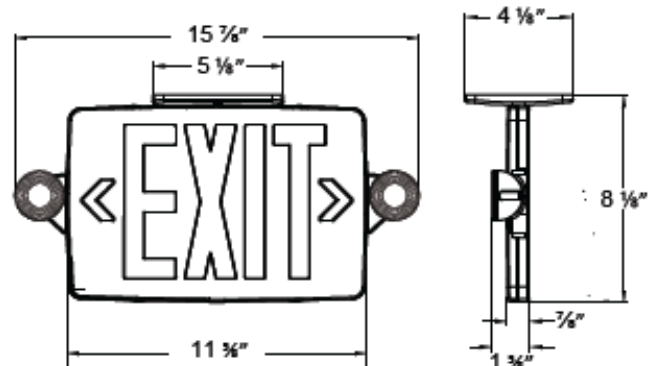

ORDERING INFORMATION

Model	No. Of Faces	Battery	Letter Color	Housing Color	Options
61101	3 Universal Single/ Double Face	Blank AC Only EM Battery Backup	R Red	W White	RC Remote Capacity