
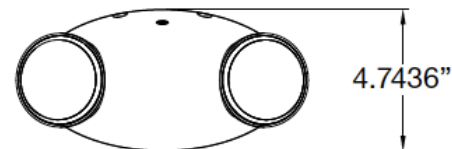


LED Emergency Light

FEATURES

- Injection-molded, high impact, UL94 V-0 Thermoplastic
- Snap- together construction speeds installation
- Universal mounting plate with quick-connect feature
- Universal J-box pattern
- Fully adjustable glare-free lighting heads
- White housing is standard, with an optional black housing available
- LED expected life is more than 10 years
- Vf (V) for lamp head LED is max. 3.6V, 20mA, max. wattage is 0.072W
- Dual-voltage input 120V or 277V AC operation
- Emergency unit provided with test switch
- Status indicator lamp
- Maintenance free sealed 3.6V Ni-Cad rechargeable battery which provides 90 minutes of emergency power
- UL 924 listed
- UL indoor damp location listed standard, 68°F (20°C) to 86°F (30°C)
- National Electrical Code (NEC)

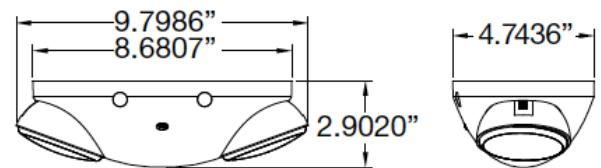

ORDERING INFORMATION

Model	Housing Color	LED	Capability	Function
61206	W = White	Blank = Standard	Blank = No Remote Load Capability	Blank = Standard