



#31046

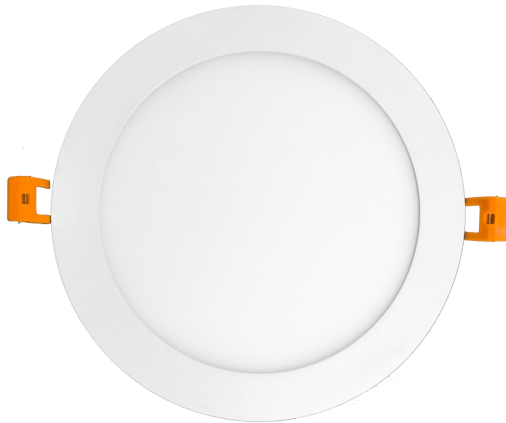

Junction box 1" thick  
included with fixture

### DIMENSIONS:

1/4" (Thick)

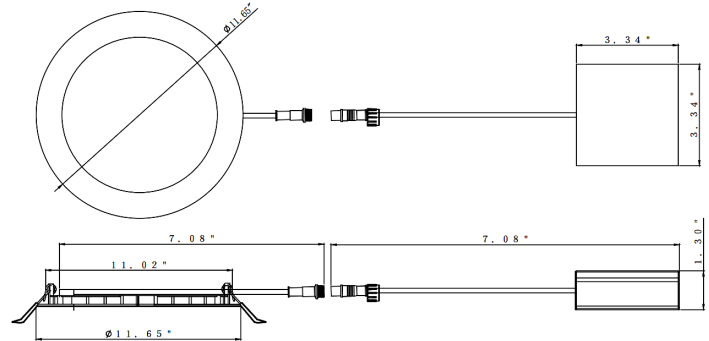

## 12" LED ULTRA SLIM RECESSED LIGHTS

Ideal for New as well as old residential and commercial constructions.

### ELECTRICAL SPECIFICATIONS:

- Voltage: 120VAC
- Wattage: 28W
- Power factor: >0.90
- Efficacy: 70LM/W

### HOUSING SPECIFICATIONS:

- 1/4" Thick
- Die-cast Aluminum with white powder coat finish
- Pot light housing is not required even for insulated ceiling
- Junction box 1" thick included with fixture
- Type IC rated: Approved for direct contact with insulation
- Operating temperature: -40°F ~ 104°F
- Lifespan: 50,000 Hrs.
- Air-tight and damp location approved

### CERTIFICATIONS: ETL, ES



### OPTIONAL ACCESSORIES:



RSL-EXT-10FT

MODEL	DESCRIPTION
EXT-10FT	10 Ft. Extension Cable For use with all Slim Light

### LIGHTING SPECIFICATIONS:

- Dimming: dimmable
- Lens: 0.125" white translucent acrylic
- Optics: White translucent acrylic
- LED: Seoul DOB (Driver On Board) Technology
- Total lumens: 2100LM
- Color temperature: 3000K/4000K/5000K
- Color rendering index: >80
- Beam Angle: 100° - 110°

### WARRANTY: 5 years

## LED ULTRA SLIM RECESSED LIGHTS

### BRAND OF DIMMERS:

NO.	BRAND	MODEL
1	Leviton	6631-1LT
2	Lutron	MACL-153MLH-AL
3	Lutron	TGCL-153PH-LA
4	Lutron	DVW-603PGH-WH
5	Lutron	CT-600PR-WH
6	Lutron	LGCL-153PHL-IV
7	Pass & Seymour	HCL453PTCCCV6
8	Pass & Seymour	LSLV603PWV