


DIMENSIONS:

8.6"(L) x 5.75"(W) x 3"(H)

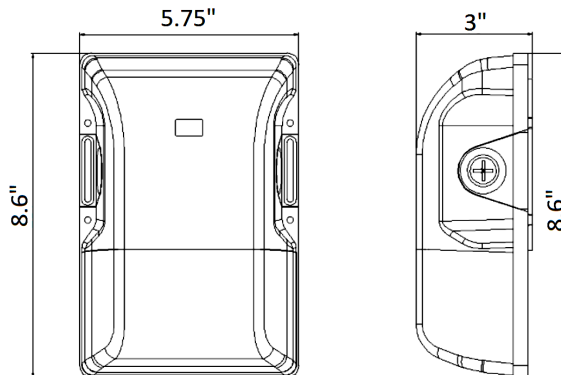

#51303

#51307

LED SMALL NON-CUTOFF WALL PACK WITH PHOTOCELL

Ideal for general site lighting, loading docks, doorway, pathway, and parking areas.

ELECTRICAL SPECIFICATIONS:

- Voltage: 100~277VAC, 60 Hz
- Wattage: 15/20/30W
- Power factor: 0.9
- Efficacy: 125 LM/W

HOUSING SPECIFICATIONS:

- Aluminum housing with Bronze/White finish
- Internal Driver
- NO UV & IR in the beam
- Operating temperature: -4°F to 113°F
- Lifespan: 70,000 hr.
- IP Rating: IP65

CERTIFICATIONS: UL



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
#51303 / #51107	15W	100~277VAC	1875LM	3/4/5/K
#51303 / #51107	20W	100~277VAC	2500LM	3/4/5/K
#51303 / #51107	30W	100~277VAC	3750LM	3/4/5/K

LIGHTING SPECIFICATIONS:

- Lens: Polycarbonate lens
- LED Type: 2835(0.5W)
- Total lumens: 1875LM-3750LM
- Color temperature: 3/4/5K
- Color rendering index: >80
- Beam Angle: 110°

WARRANTY: 5 years