


Customer Name: _____

Project Name: _____

Note: _____ Type: _____

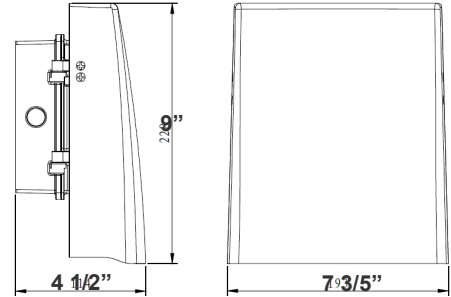

7 3/5" (W) x 9" (H) x 4 1/2" (D)

Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas. Great for use with motion sensors or another instant on/off controls.

Features

- High Light Transmittance, Anti-UV and Fire Resistant PC Lens
- Four 1/2" Knockouts: 1 Top, 1 on Each Side, 1 Back
- Die-Cast Aluminum With Powder Coat Finish (Dark Bronze)
- 5-Year Warranty
- Multi CCT and Power (Switches are inside fixture)

Technical Specification

Electrical:

- Voltage: 120-277VAC 60Hz
- Wattage: 20W/ 30W/ 40W/ 50W
- Power Factor: >0.95
- Efficacy: 125 LPW

Mechanical:

- Die-Cast Aluminum With Powder Coat Finish
- High Light Transmittance, Anti-UV and Fire Resistant Shatterproof PC Lens
- Light Head Can Be Adjusted From 0° to 90°
- Full Cutoff, Dark Sky Compliant
- Four 1/2" Knockouts: 1 Top, 1 on Each Side, 1 Back
- Operating Temperature: -4°F -104°F
- Wet Location
- 5-Year Warranty
- IP65

Lighting:


- Dimming: 0~10V Dimmable
- Multi CCT and Power (Switches are inside fixture)
- The Type II Distribution is Used For Wide Walkways, On Ramps and Entrance Roadways, As Well As Other Long, Narrow Lighting
- Total Lumens: 6150LM Max.
- Color Temperatures: 3000K/ 4000K/ 5000K/ 5700K
- Color Rendering Index: CRI ≥ 80
- Beam angle: 80° x 100°
- Rated life: 70,000 Hrs

Applications:


- General site Lighting
- Alleys
- Loading docks
- Doorways
- Pathways
- Parking areas



Photometrics: #51105

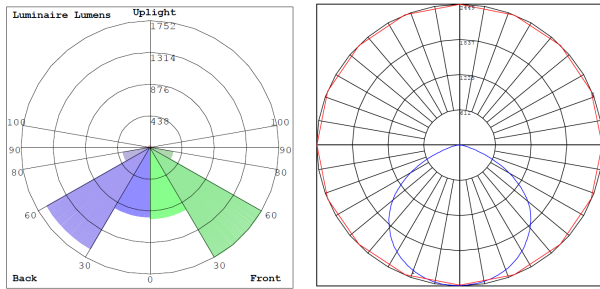

BUD Rating: B2-U2-G1

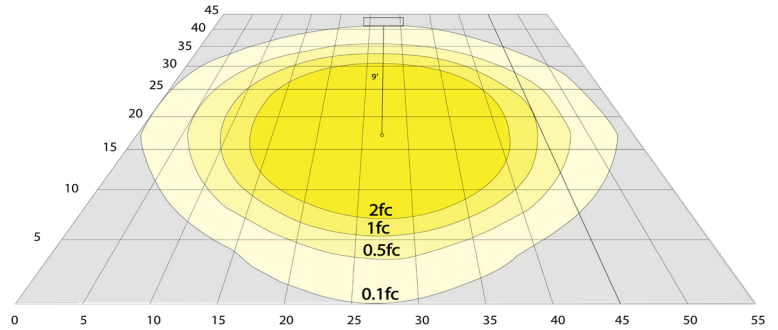


Area 45'x 55' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: #51105

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW	
#51105	20W	120~277V	2950LM	3000K 4000K 5000K 5700K	B2-U2-G1	125	
			3050LM				
			3150LM				
			3150LM				
			3950LM				
	30W		4050LM				
			4150LM				
			4150LM				
			5000LM				
			5150LM				
	40W		5300LM				
			5300LM				
			5730LM				
			50W				5850LM
							6150LM
6150LM							