Outdoor Lighting **#51107**



Type:



Project Name:

Note:



Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas. Great for use with motion sensors or another instant on/off controls.

Features

- High Light Transmittance, Anti-UV and Fire Resistant PC Lens
- Four 1/2" Knockouts: 1 Top. 1 on Each Side, 1 Back

Technical Specifications

Electrical:

- Voltage: 120-277VAC 60Hz
- Wattage: 50W/ 80W/ 100W/120W
- Power Factor: >0.95
- Efficacy: 130 LPW

Mechanical:

- Die-Cast Aluminum With Powder Coat Finish
- High Light Transmittance, Anti-UV and Fire Resistant Shatterproof PC Lens
- Light Head Can Be Adjusted From 0° to 90°
- Full Cutoff, Dark Sky Compliant
- Four 1/2" Knockouts: 1 Top. 1 on Each Side, 1 Back
- Operating Temperature: -4°F -104°F
- Wet Location
- 5-Year Warranty
- IP65

11" (W) x 13" (H) x 6" (D)

- Die-Cast Aluminum With Powder Coat Finish (Dark Bronze)
- 5-Year Warranty
- Multi CCT and Power (Switches are inside fixture)

Lighting:


- Dimming: 0~10V Dimmable
- Multi CCT and Power (Switches are inside fixture)
- The Type II Distribution is Used For Wide Walkways, On Ramps and Entrance Roadways, As Well As Other Long, Narrow Lighting
- Total Lumens: 15000LM Max
- Color Temperatures: 3000K/ 4000K/ 5000K/ 5700K
- Color Rendering Index: $CRI \ge 80$
- Beam angle: 80° x 100°
- Rated life: 70,000 Hrs

Applications:

- General site Lighting
- Alleys
- Loading docks
- Doorways
- Pathways
- Parking areas





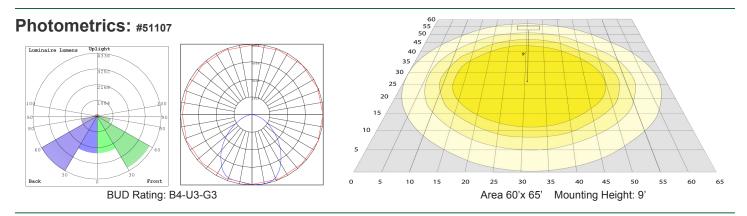

Other Views:



Performance Table: #51107

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
#51107	50W	120~277V	7000LM	3000K 4000K 5000K 5700K	B4-U3-G3	130
			7200LM			
			7400LM			
			7400LM			
	80W		10200LM			
			10500LM			
			10800LM			
			10800LM			
	100W		12000LM			
			12300LM			
			12650LM			
			12650LM			
	120W		13900LM			
			14200LM			
			15000LM			
			14900LM			

