



Selection:




Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

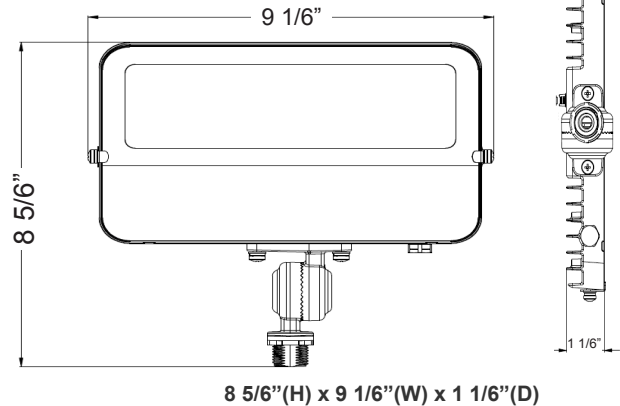

Ideal for general site lighting, alleys, loading docks, doorways, pathway, parking areas. Replace existing HID flood lights/wall packs. Great for use with motion sensors or other instant on/off controls. Solid state lighting technology for long life, low maintenance and high efficiency .

## Features

- 90° Adjustable 1/2" Knuckle Mount
- MCT: Multi Color Temperature (Switch On The Back of Fixture With Silicon Cover)
- 5-Year Warranty
- 70,000 hours rated life
- Low Maintenance and High Efficiency

## Technical Specification

### Electrical:

- Voltage: 120 VAC 50/60Hz
- Wattage: 50W
- Power Factor: >0.9
- Efficacy: 119 LPW
- THD: <25%

### Mechanical:

- Die-Cast Aluminum Housing With Powder Coat Finish (Dark Bronze Finish)
- Solid State Lighting Technology For Long Life, Low Maintenance Needed and High Efficiency
- High Conductive Aluminum LED Board
- IP Rating: IP65
- Operating Temperature: -40°F to 104°F
- Suitable for Wet Locations

### Lighting:



- Cord type: 18" SJTW 18/3 AWG cable
- MCT: Multi Color Temperature (Switch On The Back of Fixture With Silicon Cover)
- Total lumens: 6081LM
- Color temperature: 3000K/ 4000K/ 5000K
- Color rendering index: CRI > 70
- Beam Angle: 120° x 90°

### Applications:


- Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.
- Replace existing HID flood lights/ wall pack
- Great for use with motion sensors or other instant on/off controls



## Photometrics: #51533



BUD Rating: B2-U2-G1

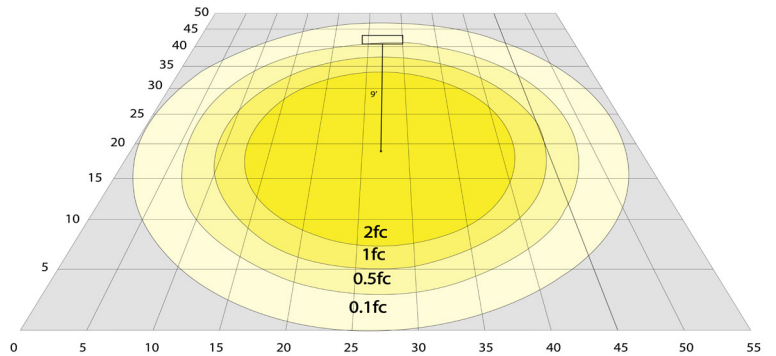

Area 50'x 55' Mounting Height: 9'

## Other Views:



Side View



Front View



Back View

## Performance Table:

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
#51533	50W	120V	6081LM	3000K 4000K 5000K	B2-U2-G1	119