

LED DOWNLIGHTS (SMOOTH TRIM)

#31365

LED TRIMS

LED Centra, Ltd.
Commercial Lighting Wholesaler



Selection:




Customer Name: _____

Project Name: _____

Note: _____

Type: _____

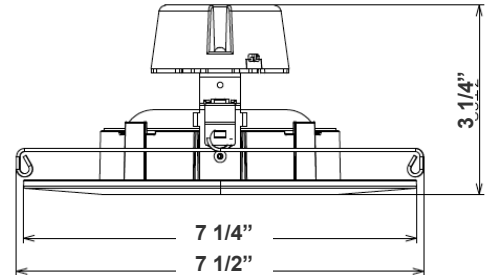

7 1/2" x 3 1/4"

LED DOWNLIGHTS (SMOOTH TRIM) - 4" ROUND Ideal for New as well as old residential and commercial constructions.

Features

- 6" Smooth Recessed Trim
- Multi CCT (Selectable Switch on the Back of the driver)
- Isolated Driver for Improved Thermal Management
- Can Rotate after Installation to Align
- 5-Year Warranty
- Spun Aluminum White Powder Coat Finish
- Tilts to 45°

Technical Specification

Electrical:

- Voltage: 120V AC
- Output Voltage: 36VDC
- Power Factor: >0.90
- Wattage: 11W
- Efficacy: 81 LP
- Total Harmonic Distortion: ≤15 %

Mechanical:

- Spun Aluminum with White Powder Coat Finish
- Includes 8" Medium Base E-26 Screw-in Adapter That Fits any Standard Incandescent Down-light
- Maximum Ambient Temperature: 104°F
- Fits in Standard 6" Recessed Housings
- Rated life: 50,000 hrs
- Damp Location

Lighting:

- Dimming: TRIAC Dimming (Using Standard TRIAC LED Dimmers)
- LED: Epistar Chip (COB) and Driver—35,000-hour Design Life
- Can Rotate after Installation to Align
- Adjustable Lens" & "Tilts 45°
- Optics: White Translucent Acrylic Lens
- Total Lumens: 900LM
- Color Temperatures: 2700K/ 3000K/ 3500K/ 4000K/ 5000K
- Multi CCT (Selectable Switch on the Back of the driver)
- Color Rendering Index: CRI ≥ 90

Applications:



- LED retrofit trim have been designed to be a flexib lighting solution for retrofit and new constructio applications, Ideal for closets,storage areas, attics, corridors, or general lighting solutions for residential and commercial applications




LED Centra, Ltd.
Commercial Lighting Wholesaler

ADDRESS: 13407 DOVER RD APPLECREEK, OH 44606
EMAIL: ORDERS@LEDCENTRA.COM **PHONE:** 330-440-8322

Photometrics: #31365

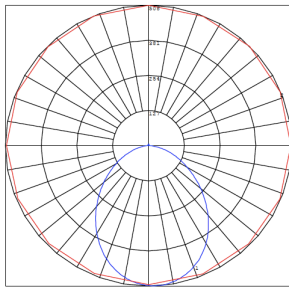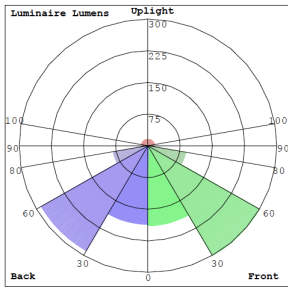

BUG Rating: B1-U2-G0

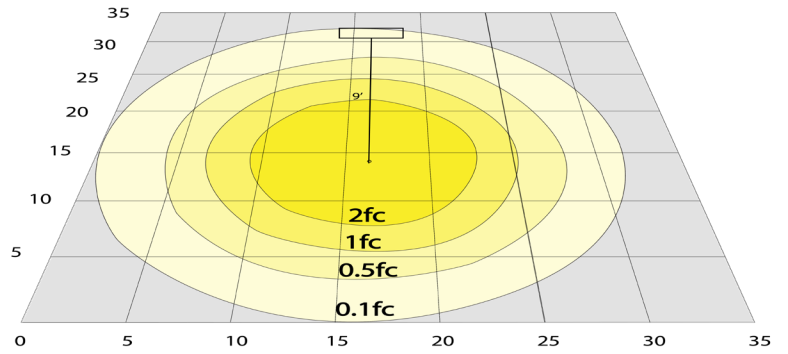


Area 35'x 35' Mounting Height: 9'


Other Views:



Side View



Front View



Back View

Performance Table: #31365

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Ratin	LPW
#31365	11W	120V	900LM	2700K	B1-U2-G0	81
				3000K		
				3500K		
				4000K		
				5000K		

ACCESSORY:



E-26

Includes Medium Base E-26
Screw-in Adapter That Fits Any
Standard

FACTORY-INSTALLED OPTION:



EXTERNAL BATTERY BACKUP