

LED Linear High Bay

3-Wattages + 3-CCT (35/40/50K), Damp Rated, 150 lm/W, Dimmable + Smart

FEATURES

Lumen Output	12000 to 24750 lumens
Efficacy	150 lm/W
Input Voltage	120-277V
Dimmable	0-10V Continuous
Size	2-FT
Wattage	3-WATT (165W Max)
CCT	3-CCT Select (3500K, 4000K, 5000K)
Rating	Damp Location
Warranty	5 Years

APPLICATIONS

Premium indoor luminaire for hanging or pendant mounting in high ceiling spaces below and above 25 feet. Suitable for gymnasiums, warehouses, manufacturing, packaging, storage, aisles, and covered decks.

CONSTRUCTION

Manufactured for durability using aluminum sheet housing with semi-gloss coating to resist corrosion, discoloration, and scratching. Ventilated driver bay for additional heat dissipation. Damp Location rated.

ELECTRICAL

Input voltages 120-277V models with 0-10V Continuous Dimming. Tunable 3-CCT (3500K, 4000K, 5000K) and Tunable 3-Wattages. Operating temperatures -40°F to 113°F (-40°C to 45°C).

MOUNTING

Aluminum V-Hooks and Chains for hanging standard. Optional Pendant Mount Bracket or pair of 10-FT Aircraft Hanging Cables available. Includes 6-inch 5 core, 18AWG wiring cable.

OPTICS

Anti-UV Frosted Micro-Filter Polycarbonate Lens standard.

CONTROLS

Fixture mounted PIR or Microwave AUX Input Smart Sensor with Daylight Priority. Remote Control available. Installed Step-Down Autotransformer for 480V to 277V applications available.

EMERGENCY

Installed 90 Minute Emergency Backup Battery Driver options available.

LISTINGS


DLC Premium listed. UL certified to meet US and Canadian standards. FCC and RoHS compliant.

WARRANTY


5 year exclusive limited warranty.

Project:
Date:
Catalog No:
Prepared By:

2-FT and 3-FT Tunable Models

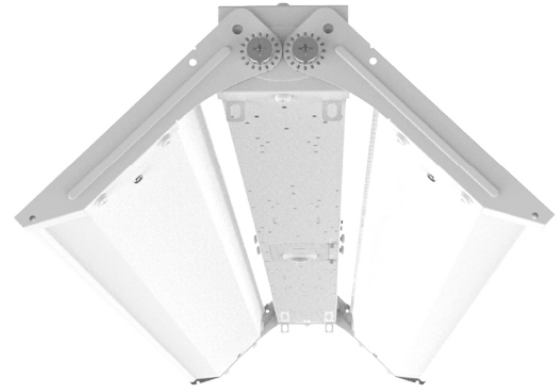

Adjustable Beam Spread

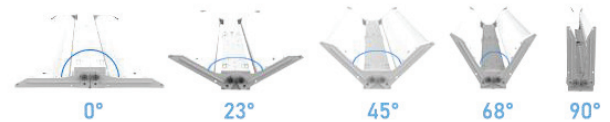

PIR Sensor



Microwave Sensor



Remote Control



Emergency Driver





TUNABLE CORRELATED COLOR TEMPERATURES (CCT)

3500K

4000K

5000K



SPECIFICATIONS

ENERGY DATA

Input Voltage: 120-277V
Input Frequency: 50/60 Hz
Wattage: 3-Wattages (165W Max, 220W Max, 300W Max)
Power Factor: >0.9
Total Harmonic Distortion (THD): <15%
Operating Temperature: -40°F to 113°F (-40°C to 45°C)

LIGHTING DATA

Lumens: 12000 to 45000
Lumens Per Watt: 150 lm/W
Correlated Color Temperature (CCT): 3-CCT (35K, 40K, 50K)
Dimmable: 0-10V
Color Rendering Index (CRI): >70
L70: 50000 hours

ORDERING INFORMATION

Model	Size	Wattage	Voltage	Current	Lumens	Efficacy	CCT	Dimming	Color	Dimensions
11023	2-FT	(80W 110W 165W)	120-277V	0.73A@120V, 0.32A@277V 1.01A@120V, 0.44A@277V 1.51A@120V, 0.66A@277V	12000 16500 24750	150 lm/W	(3500K, 4000K, 5000K)	0-10V	White	23.64"L x 12.54"W x 1.85"H

Mount	Control	Emergency
AC-10 Pair of 10-FT Aircraft Hanging Cables	HD09VR-PH-1 12V DC PIR Bi-Level Daylight High Bay AUX Smart Sensor with Rotator Switches	EM15 (BLD-CM15N-YYY) [INSTALLED] Emergency LED Driver, 15W, 90-Min Battery
(Blank) V-Hooks and Chains (Standard)	HD09VR-MH-1 12V DC MW Bi-Level Daylight High Bay AUX Smart Sensor with Rotator Switches HD06R Sensor Remote Control with LCD Display (HD Series) SD250 [INSTALLED] Step-Down Autotransformer 480V to 277V, Up To 250W SD375 [INSTALLED] Step-Down Autotransformer 480V to 277V, Up To 375W	EM20 (BLD-CM20N-YYY) [INSTALLED] Emergency LED Driver, 20W, 90-Min Battery

PHYSICAL DIMENSIONS

2-FT Models

23.64"L x 12.54"W x 1.85"H

