

Selectable LED Surface Round Down Lights

Wattages: 18W , 24W , 30W



The Selectable LED Surface Round Down Lights Series can be widely used for Indoor Excellent for Hallways, Multipurpose Rooms , Underground parking,super market, store and many other applications.

WATT/CCT
SELECTABLE



Features:

- Lumileds LED, high luminous efficiency and long working life.
- High efficiency LED Driver, the wide range input voltage AC120-347V.
- Excellent Optics design,greatly improve the light utilization and evenness.
- **The 1-10V Dimming type is continuous.**
- Emergency Backup Battery LED Driver (Optional).

Packaging information:

Carton Size:540mmX355mmX275mm
21.26"X13.98"X10.83"(10Pcs/CTN)


Inside The Box:260mmX65mmX260mm
10.24"x2. 56" x10. 24"(1Pcs/CTN)

SPECIFICATION			
TYPE	31361		
WATTAGE	18W	24W	30W
LUMEN	2111 lm & 4000K	2960 lm & 4000K	3574 lm & 4000K
EFFICACY	> 120 lm/W		
CCT	3000K,4000K,5000K		
CRI	> 80		
INPUT VOLTAGE	AC120-347V		
LIGHTING ANGLE	108°		
FACTORY SETTINGS	30W & 4000K		
LED TYPE	2835		
PF	> 0.90		
DRIVER EFFICIENCY	> 90%		
PROTECTION LEVEL	Damp		
LIFE TIME	> 50000 hours		
OPERATING TEMPERATURE	-4°F~122°F		
ACCREDITATION	UL,Energy Star		
WARRANTY	5 year limited		

Selectable LED Surface Round Down Lights

Wattages: 18W , 24W , 30W

Dimension:

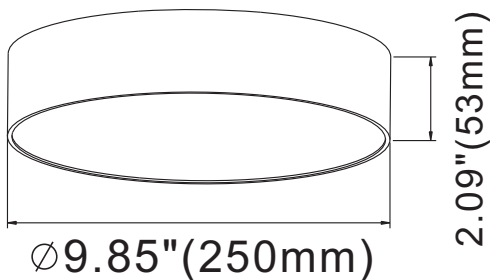

Specifications:

Shell materials: Aluminum & PC.


Net weight : 0.91Kg (2.0 lbs)

Finish: White(Standard)

Product Size: $\varphi 250\text{mm} \times 53\text{mm}$

$\varphi 9.85" \times 2.09"$

Control Module:

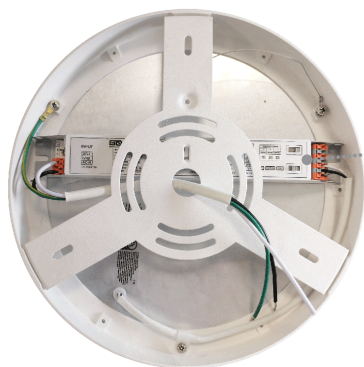

WATT/CCT
SELECTABLE




Selectable CCT

Three position sliding switch
3000K / 4000K / 5000K



Selectable Power

Three position sliding switch
18W / 24W / 30W

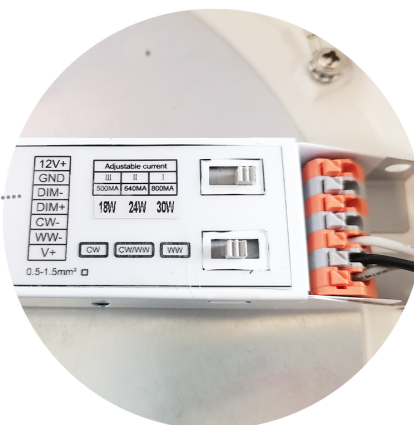

EMERGENCY BACK-UP (SOLD SEPARATELY)



4W Emergency Backup
Battery LED Driver



CONTROL (SOLD SEPARATELY)



Microwave Motion Sensor



Microwave Sensor
Remote Controller





Selectable LED Surface Round Down Lights

Wattages: 18W , 24W , 30W





PHOTOMETRICS:

For complete IES files, please visit our website.

31361 (30W&3000K)

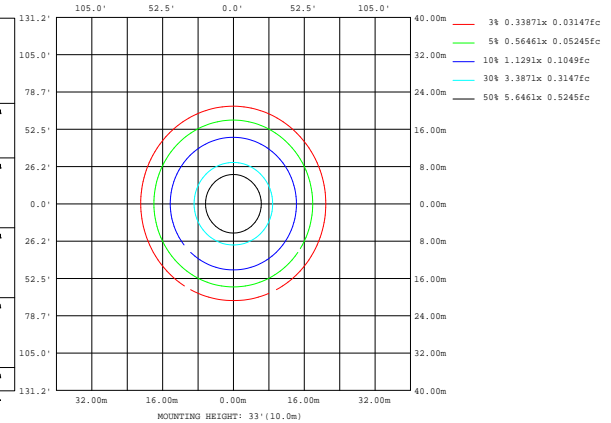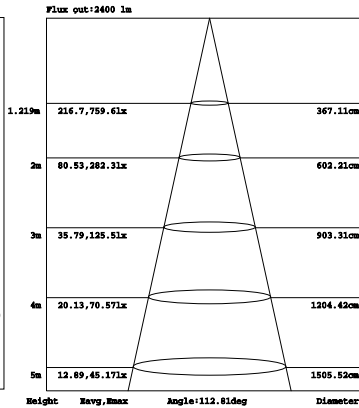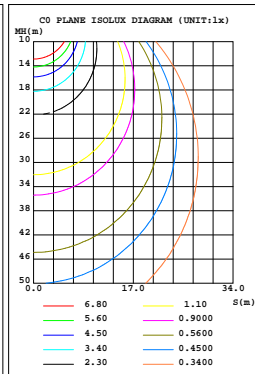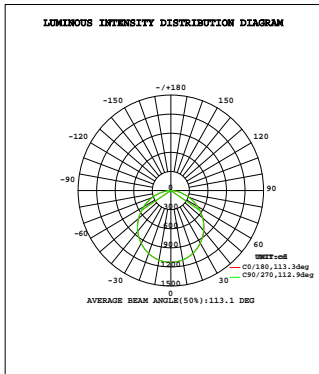

31361 (30W&4000K)

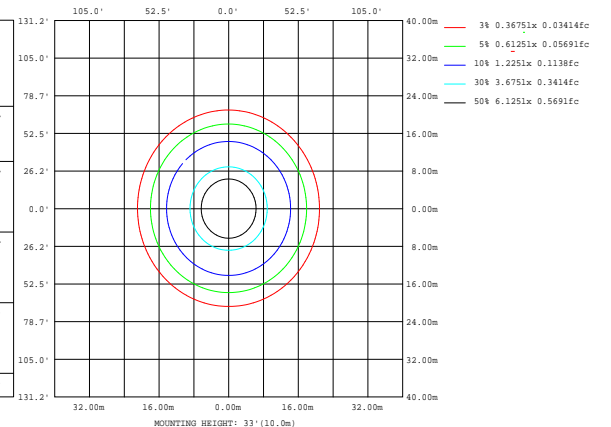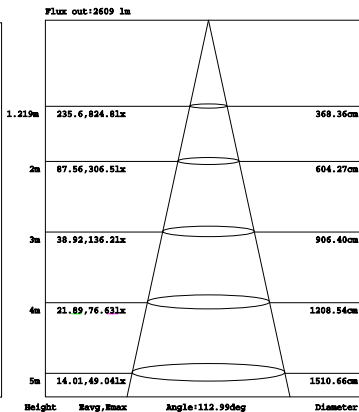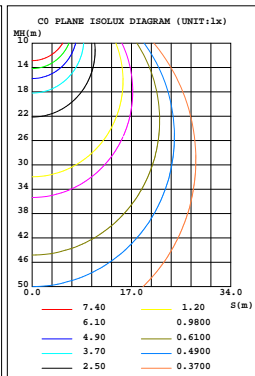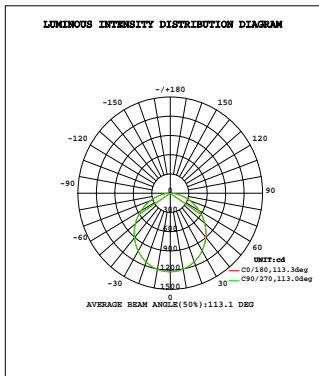

31361 (30W&5000K)

